
4-1/2", 5" & 6" ANGLE GRINDERS



INNOVATION

SJS - SUPER JOINT SYSTEM



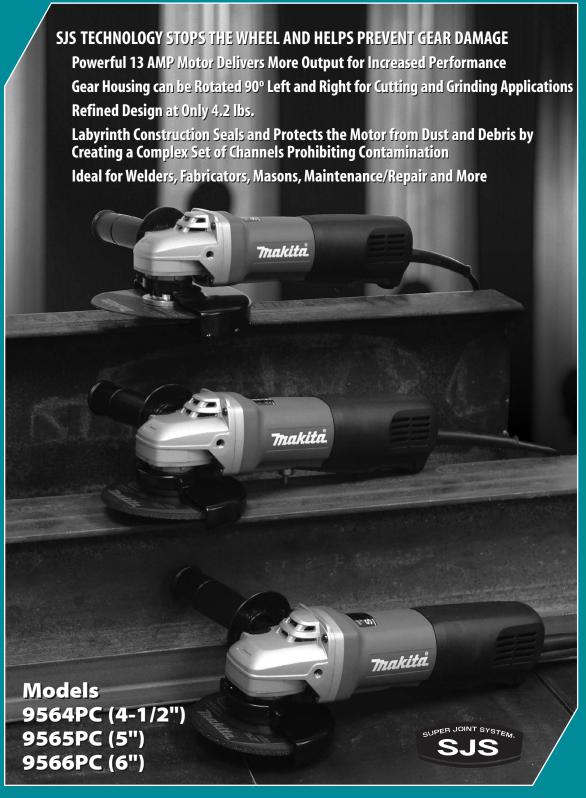

spiral bevel gear are connected by a coil spring

rotate, the coil tightens around the spiral bevel gear, which drives the grinding wheel.



If the grinding wheel should accidentally catch or bind. the gears automatically disengage from the motor SJS stops the wheel minimizes grinder kickback, and protects the gears

Lock Spring that joins armature shaft and spiral bevel gear protects the gears by absorbing shock

DURABILITY



Protective Zig-Zag varnish seals the motor from dust and debris for longer life

COMFORT



Ergonomic paddle switch for operator comfort

PERFORMANCE DRIVEN

4-1/2", 5" & 6" ANGLE GRINDERS

Models 9564PC, 9565PC, 9566PC

FEATURES & BENEFITS

- Super Joint System (SJS) helps prevent gear damage
- Powerful 13 AMP motor delivers more output for increased performance
- Gear housing rotates 90° left and right for cutting and grinding applications
- Refined design at only 4.2 lbs.
- "Tool-less" wheel guard to help increase productivity
- Labyrinth construction seals and protects the motor from dust and debris by creating a complex set of channels prohibiting contamination
- Externally accessible brushes for greater serviceability
- Ideal for welders, fabricators, masons, maintenance/repair and more

STANDARD EQUIPMENT

	9564PC	9565PC	9566PC
4-1/2" Grinding wheel (741423-0-1)	•		
5" Grinding wheel (741407-8-1)		•	
6" Cutting wheel (724117-A)			•
"Tool-less" wheel guard (135107-4)	•		
"Tool-less" wheel guard (135108-2)		•	
Cutting wheel guard (165486-6)			•
Inner flange (224399-1)	•	•	
Inner flange (224390-9)			•
Lock nut (224568-4)	•	•	
Lock nut (224574-9)			•
Side handle (153489-2)	•	•	•
Lock nut wrench (782424-9)	•	•	•

S	P	EC	F	C	Ш	0	NS
	-			7			

9564PC	9565PC	9566PC
4-1/2"	5"	6"
3-1/2"	3-1/2"	3-1/2"
4-1/2"	5"	6"
11,500 RPM	11,500 RPM	10,000 RPM
13	13	13
5/8" - 11 UNC	5/8" - 1 UNC	5/8" - 11 UNC
12-1/8"	12-1/8"	12-1/8"
4.2 lbs.	4.2 lbs.	4.2 lbs.
088381-085144	088381-085168	088381-085182
	4-1/2" 3-1/2" 4-1/2" 11,500 RPM 13 5/8" - 11 UNC 12-1/8" 4.2 lbs.	4-1/2" 5" 3-1/2" 3-1/2" 4-1/2" 5" 11,500 RPM 11,500 RPM 13 13 5/8" - 11 UNC 5/8" - 1 UNC 12-1/8" 12-1/8" 4.2 lbs. 4.2 lbs.

OPTIONAL ACCESSORIES

















Warning: Consult owner/operator manual and adhere to all safety precautions for accessory items. Always use recommended guards. Failure to do so may result in serious injury or death. Refer to ANSI B7.1 and owner/operator manual for proper accessory mounting and grinding procedures and always wear ANSI Z87.1 eye protection.

Makita offers a wide variety of ANGLE GRINDER accessories. For a complete listing, please refer to the Makita General Catalog, or visit our website at makitatools.com, or call 1-800-4MAKITA.

